

GORE® VIABAHN®

Endoprosthesis with
PROPATEN Bioactive Surface

Together, improving life



GORE® VIABAHN®
ENDOPROSTHESIS WITH
PROPATEN BIOACTIVE SURFACE*
— CONFIGURATIONS

* As used by Gore, PROPATEN Bioactive Surface refers to Gore's proprietary CBAS Heparin Surface.



Sizing Table

0.035" Guidewire compatible — with radiopaque markers

Device Sizing		Introducer Sheath (Fr)					
Endoprosthesis labeled diameter (mm)*	Recommended vessel diameter† (mm)	2.5 cm Device Length*	5 cm Device Length*	10 cm Device Length*	15 cm Device Length*	25 cm Device Length*	Recommended Balloon Diameter for Device Touch-up ⁵ (mm)
5	4.0–4.7	7	7	7	7	7	5
6	4.8–5.5	7	7	7	7	7	6
7	5.6–6.5	8	8	8	8	8	7
8	6.6–7.5	8	8	8	8	8	8
9	7.6–8.5	–	8	8	8	–	9
10	8.6–9.5	–	8	8	8	–	10
11	9.6–9.5	–	10	10	–	–	12
13	10.6–12.0	–	10 [†]	10 [†]	–	–	14

0.014"/0.018" Guidewire compatible — with radiopaque markers

Device Sizing		Introducer Sheath (Fr)					
Endoprosthesis labeled diameter (mm)*	Recommended vessel diameter† (mm)	2.5 cm Device Length*	5 cm Device Length*	10 cm Device Length*	15 cm Device Length*	25 cm Device Length*	Recommended Balloon Diameter for Device Touch-up (mm)
5	4.0–4.7	6	6	6	6	6	5
6	4.8–5.5	6	6	6	6	6	5
7	5.6–6.5	7	7	7	7	7	7
8	6.6–7.5	7	7	7	7	7 [¶]	8

Catalogue listings

0.014"/0.018" Guidewire compatible – with radiopaque markers


Catalogue Number	Endoprosthesis Labeled Diameter* (mm)	Endoprosthesis Length* (cm)	Catheter Length (cm)	Recommended Vessel Diameter† (mm)	Device Profile (Fr)
PAJR050202E	5	2.5	120	4.0–4.7	6
PAJR050502E	5	5	120	4.0–4.7	6
PAJR051002E	5	10	120	4.0–4.7	6
PAJR051502E	5	15	120	4.0–4.7	6
PAJR052502E	5	25	120	4.0–4.7	6
PAJR060202E	6	2.5	120	4.8–5.5	6
PAJR060502E	6	5	120	4.8–5.5	6
PAJR061002E	6	10	120	4.8–5.5	6
PAJR061502E	6	15	120	4.8–5.5	6
PAJR062502E	6	25	120	4.8–5.5	6
PAJR070202E	7	2.5	120	5.6–6.5	7
PAJR070502E	7	5	120	5.6–6.5	7
PAJR071002E	7	10	120	5.6–6.5	7
PAJR071502E	7	15	120	5.6–6.5	7
PAJR072502E	7	25	120	5.6–6.5	7
PAJR080202E	8	2.5	120	6.6–7.5	7
PAJR080502E	8	5	120	6.6–7.5	7
PAJR081002E	8	10	120	6.6–7.5	7
PAJR081502E	8	15	120	6.6–7.5	7
PAJR082502E	8	25	120	6.6–7.5	7 [¶]

Sizing Table

0.035" Guidewire compatible — with radiopaque markers

Catalogue Number	Endoprosthesis Labeled Diameter* (mm)	Endoprosthesis Length* (cm)	Catheter Length ^{II} (cm)	Recommended Vessel Diameter [‡] (mm)	Device Profile (Fr)
PAHR050202E	5	2.5	120	4.0–4.7	7
PAHR050502E	5	5	120	4.0–4.7	7
PAHR051002E	5	10	120	4.0–4.7	7
PAHR051502E	5	15	120	4.0–4.7	7
PAHR052502E	5	25	120	4.0–4.7	7
PAHR060201E	6	2.5	75	4.8–5.5	7
PAHR060202E	6	2.5	120	4.8–5.5	7
PAHR060501E	6	5	75	4.8–5.5	7
PAHR060502E	6	5	120	4.8–5.5	7
PAHR061001E	6	10	75	4.8–5.5	7
PAHR061002E	6	10	120	4.8–5.5	7
PAHR061501E	6	15	75	4.8–5.5	7
PAHR061502E	6	15	120	4.8–5.5	7
PAHR062502E	6	25	120	4.8–5.5	7
PAHR070201E	7	2.5	75	5.6–6.5	8
PAHR070202E	7	2.5	120	5.6–6.5	8
PAHR070501E	7	5	75	5.6–6.5	8
PAHR070502E	7	5	120	5.6–6.5	8
PAHR071001E	7	10	75	5.6–6.5	8
PAHR071002E	7	10	120	5.6–6.5	8
PAHR071501E	7	15	75	5.6–6.5	8
PAHR071502E	7	15	120	5.6–6.5	8
PAHR072502E	7	25	120	5.6–6.5	8
PAHR080201E	8	2.5	75	6.6–7.5	8
PAHR080202E	8	2.5	120	6.6–7.5	8
PAHR080501E	8	5	75	6.6–7.5	8
PAHR080502E	8	5	120	6.6–7.5	8
PAHR081001E	8	10	75	6.6–7.5	8
PAHR081002E	8	10	120	6.6–7.5	8
PAHR081501E	8	15	75	6.6–7.5	8
PAHR081502E	8	15	120	6.6–7.5	8
PAHR082502E	8	25	120	6.6–7.5	8
PAHR090502E	9	5	120	7.6–8.5	8
PAHR091002E	9	10	120	7.6–8.5	8
PAHR091502E	9	15	120	7.6–8.5	8
PAHR100502E	10	5	120	8.6–9.5	8
PAHR101002E	10	10	120	8.6–9.5	8
PAHR101502E	10	15	120	8.6–9.5	8
PAHR110502E	11	5	120	9.6–10.5	10
PAHR111002E	11	10	120	9.6–10.5	10
PAHR130502E	13	5	120	10.6–12.0	10 [†]
PAHR131002E	13	10	120	10.6–12.0	10 [†]

KEY: PRODUCT NUMBERING SYSTEM (EXAMPLE ONLY)

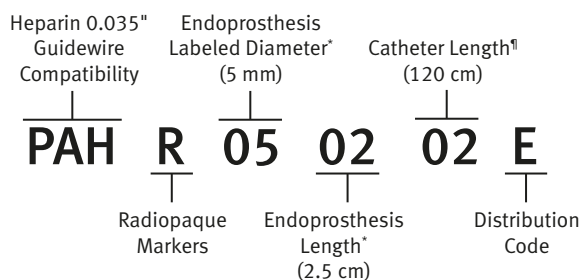

PAH Heparin 0.035" Guidewire Compatibility

PAJ Heparin 0.014" or 0.018" Guidewire Compatibility

* Labeled device diameters and lengths are nominal.

† The 13 mm diameter device is not compatible with the 10 Fr COOK® FLEXOR® CHECK-FLO® Sheath.

‡ Recommended endoprosthesis compression within the vessel is approximately 5 – 20%.

§ For the 11 and 13 mm diameter devices, balloon inflation pressure should not exceed 8 atm.

|| Ensure the guidewire is the appropriate size (see *Instructions for Use*) and has a length at least twice that of the delivery catheter.

¶ The 8 mm x 25 cm device is not compatible with the 7 Fr COOK® FLEXOR® CHECK-FLO® Sheath.

 Consult Instructions
for Use
eifu.goremedical.com

Refer to *Instructions for Use* at eifu.goremedical.com for a complete description of all applicable indications, warnings, precautions and contraindications for the markets where this product is available. ^{Rx Only}

Products listed may not be available in all markets.

COOK, CHECK-FLO and FLEXOR are trademarks of Cook Medical, Inc.

CBAS is a trademark of Carmeda AB, a wholly owned subsidiary of W. L. Gore & Associates, Inc.

GORE, *Together, improving life*, VIABAHN and designs are trademarks of W. L. Gore & Associates.

© 2021 W. L. Gore & Associates GmbH 21104779-EN1 APRIL 2021

W. L. Gore & Associates, Inc.
goremedical.com

Asia Pacific +65 6733 2882 **Australia/New Zealand** 1800 680 424 **Europe** 00800 6334 4673
United States Flagstaff, AZ 86003 800 437 8181 928 779 2771

